



---

## *Robotics 2*

# Dynamic model of robots: Newton-Euler approach

Prof. Alessandro De Luca

DIPARTIMENTO DI INGEGNERIA INFORMATICA  
AUTOMATICA E GESTIONALE ANTONIO RUBERTI



SAPIENZA  
UNIVERSITÀ DI ROMA

# Approaches to dynamic modeling

(reprise)



## energy-based approach (Euler-Lagrange)

- multi-body robot seen as a whole
- constraint (internal) reaction forces between the links are automatically eliminated: in fact, they do not perform work
- closed-form (symbolic) equations are directly obtained
- best suited for study of dynamic properties and **analysis** of control schemes



## Newton-Euler method (balance of forces/moments)

- dynamic equations written separately for each link/body
- mainly used for **inverse dynamics in real time**
  - equations are evaluated in a **numeric** and **recursive** way
  - best for **synthesis** (=implementation) of model-based control schemes
- by eliminating the internal reaction forces and performing back-substitution of all expressions, we get dynamic equations in closed-form (identical to Euler-Lagrange!)




# Derivative of a vector in a moving frame

... from velocity to acceleration


$${}^0v_i = {}^0R_i {}^i v_i \qquad {}^0\dot{R}_i = S({}^0\omega_i) {}^0R_i$$

$$\begin{aligned} {}^0\dot{v}_i &= {}^0a_i = {}^0R_i {}^i a_i = {}^0R_i {}^i \dot{v}_i + {}^0\dot{R}_i {}^i v_i \\ &= {}^0R_i {}^i \dot{v}_i + {}^0\omega_i \times {}^0R_i {}^i v_i = {}^0R_i ({}^i \dot{v}_i + {}^i \omega_i \times {}^i v_i) \end{aligned}$$



$${}^i a_i = {}^i \dot{v}_i + {}^i \omega_i \times {}^i v_i$$

derivative of a "unit" vector  
in a moving frame

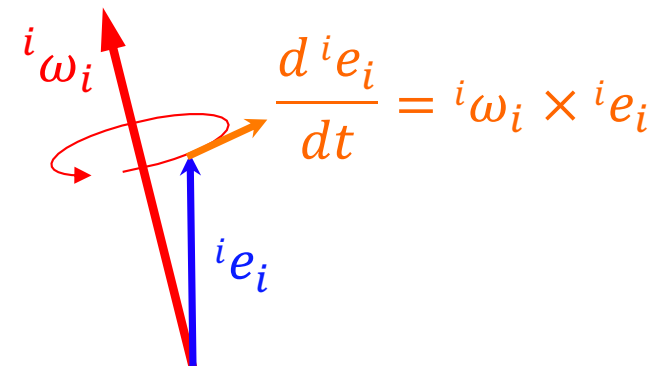



# Dynamics of a rigid body

- **Newton** dynamic equation

- **balance**: sum of forces = variation of **linear** momentum

$$\sum f_i = \frac{d}{dt} (mv_c) = m\dot{v}_c$$

- **Euler** dynamic equation

- **balance**: sum of moments = variation of **angular** momentum

$$\begin{aligned} \sum \mu_i &= \frac{d}{dt} (I\omega) = I\dot{\omega} + \frac{d}{dt} (R\bar{I}R^T) \omega = I\dot{\omega} + (\dot{R}\bar{I}R^T + R\bar{I}\dot{R}^T) \omega \\ &= I\dot{\omega} + S(\omega)R\bar{I}R^T \omega + R\bar{I}R^T S^T(\omega) \omega = I\dot{\omega} + \omega \times I\omega \end{aligned}$$

- principle of **action and reaction**


- forces/moments: applied **by** body ***i*** **to** body ***i + 1***  
= **–** applied **by** body ***i + 1*** **to** body ***i***



# Newton-Euler equations - 1

link  $i$

FORCES

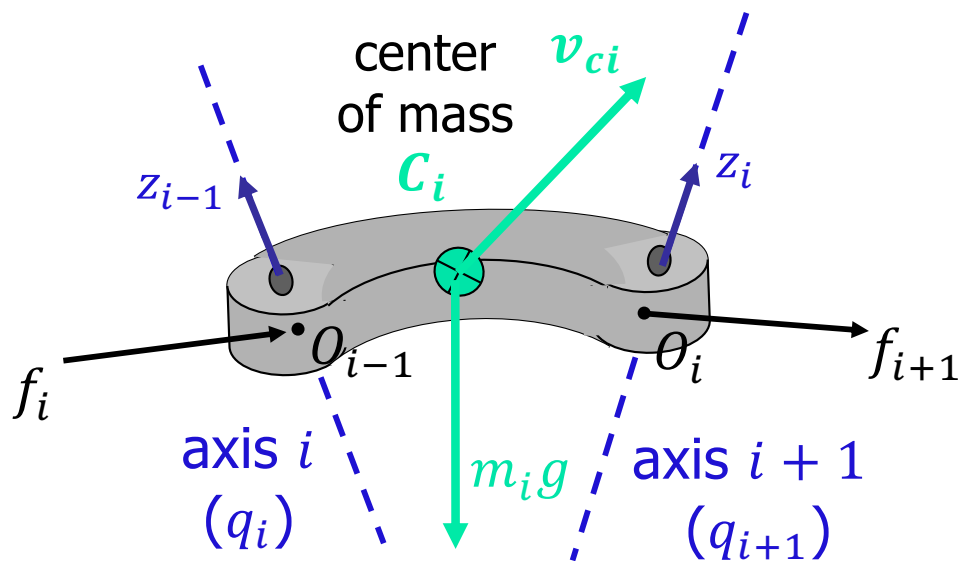

$f_i$  force applied from link  $i - 1$  on link  $i$

$f_{i+1}$  force applied from link  $i$  on link  $i + 1$

$m_i g$  gravity force

all vectors expressed in the same RF (better in  $RF_i$  ...)

Newton equation

$$f_i - f_{i+1} + m_i g = m_i a_{ci}$$

N

linear acceleration of  $C_i$



# Newton-Euler equations - 2

link  $i$

## MOMENTS

$\tau_i$  moment applied from link  $(i - 1)$  on link  $i$

$\tau_{i+1}$  moment applied from link  $i$  on link  $(i + 1)$


$f_i \times r_{i-1,ci}$  moment due to  $f_i$  w.r.t.  $C_i$

$-f_{i+1} \times r_{i,ci}$  moment due to  $-f_{i+1}$  w.r.t.  $C_i$

Euler equation

$$\tau_i - \tau_{i+1} + f_i \times r_{i-1,ci} - f_{i+1} \times r_{i,ci} = I_i \dot{\omega}_i + \omega_i \times (I_i \omega_i)$$

angular acceleration of body  $i$

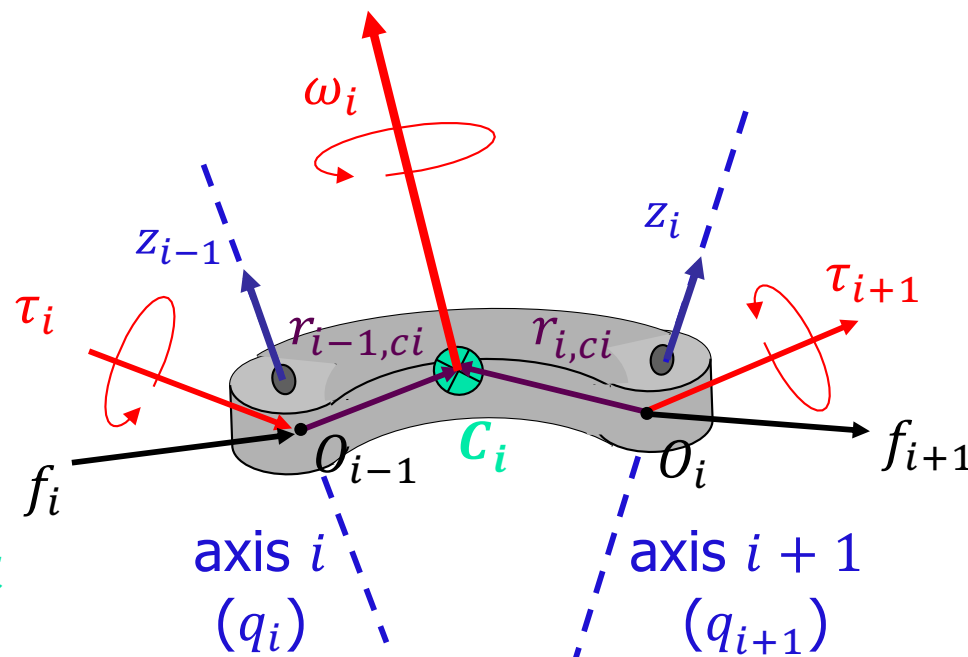

all vectors expressed in the same RF (... RF<sub>i</sub> !!)

gravity force gives no moment at  $C_i$

E



# Forward recursion

## Computing velocities and accelerations

- “moving frames” algorithm (as for velocities in Lagrange)
- for simplicity, only revolute joints here (see [textbook](#) for the more general treatment)

### initializations

$${}^i\omega_i = {}^{i-1}R_i^T [{}^{i-1}\omega_{i-1} + \dot{q}_i {}^{i-1}z_{i-1}]$$

←  ${}^0\omega_0$

$${}^i\dot{\omega}_i = {}^{i-1}R_i^T [{}^{i-1}\dot{\omega}_{i-1} + \ddot{q}_i {}^{i-1}z_{i-1}] + {}^{i-1}\dot{R}_i^T [{}^{i-1}\omega_{i-1} + \dot{q}_i {}^{i-1}z_{i-1}]$$

AR

$$= {}^{i-1}R_i^T [{}^{i-1}\dot{\omega}_{i-1} + \ddot{q}_i {}^{i-1}z_{i-1} + \dot{q}_i {}^{i-1}\omega_{i-1} \times {}^{i-1}z_{i-1}]$$

←  ${}^0\dot{\omega}_0$

$${}^i a_i = {}^{i-1}R_i^T {}^{i-1} a_{i-1} + {}^i\dot{\omega}_i \times {}^i r_{i-1,i} + {}^i\omega_i \times ({}^i\omega_i \times {}^i r_{i-1,i})$$

←  ${}^0 a_0 - {}^0 g$

$${}^i a_{ci} = {}^i a_i + {}^i\dot{\omega}_i \times {}^i r_{i,ci} + {}^i\omega_i \times ({}^i\omega_i \times {}^i r_{i,ci})$$

the gravity force term can be skipped in Newton equation, if added here



# Backward recursion

## Computing forces and moments

from  $N_i$  → to  $N_{i-1}$  eliminated, if inserted in forward recursion ( $i=0$ ) **initializations**

$${}^i f_i = {}^i R_{i+1} {}^{i+1} f_{i+1} + m_i ({}^i a_{ci} - \cancel{{}^i g}) \quad \leftarrow f_{N+1} \quad \tau_{N+1}$$

**F/MR**

$${}^i \tau_i = {}^i R_{i+1} {}^{i+1} \tau_{i+1} + ({}^i R_{i+1} {}^{i+1} f_{i+1}) \times {}^i r_{i,ci} - {}^i f_i \times ({}^i r_{i-1,i} + {}^i r_{i,ci}) + {}^i I_i {}^i \dot{\omega}_i + {}^i \omega_i \times {}^i I_i {}^i \omega_i$$

from  $E_i$  → to  $E_{i-1}$

at each recursion step, the two vector equations ( $N_i + E_i$ ) at joint  $i$  provide a wrench  $(f_i, \tau_i) \in \mathbb{R}^6$ : this contains ALSO **reaction forces/moments** at the joint axis  $\Rightarrow$  to be **projected** along/around this axis to produce **work**

$$\text{FP} \quad u_i = \begin{cases} {}^i f_i^T {}^i z_{i-1} + F_{vi} \dot{q}_i & \text{for prismatic joint} \\ {}^i \tau_i^T {}^i z_{i-1} + F_{vi} \dot{q}_i & \text{for revolute joint} \end{cases}$$



**$N$  scalar equations at the end**

**generalized forces**  
(in rhs of Euler-Lagrange eqs)

**add any dissipative term**  
(here, viscous friction only)





# Comments on Newton-Euler method


---

- the previous forward/backward recursive formulas can be evaluated in symbolic or numeric form
  - **symbolic**
    - substituting expressions in a recursive way
    - at the end, a closed-form dynamic model is obtained, which is identical to the one obtained using Euler-Lagrange (or any other) method
    - there is **no** special convenience in using N-E in this way ...
  - **numeric**
    - substituting numeric values (numbers!) at each step
    - **computational complexity** of each step remains constant  $\Rightarrow$  grows **in a linear fashion** with the number  $N$  of joints ( $O(N)$ )
    - strongly recommended for real-time use, especially when the number  $N$  of joints **is large**



# Newton-Euler algorithm

efficient computational scheme for inverse dynamics

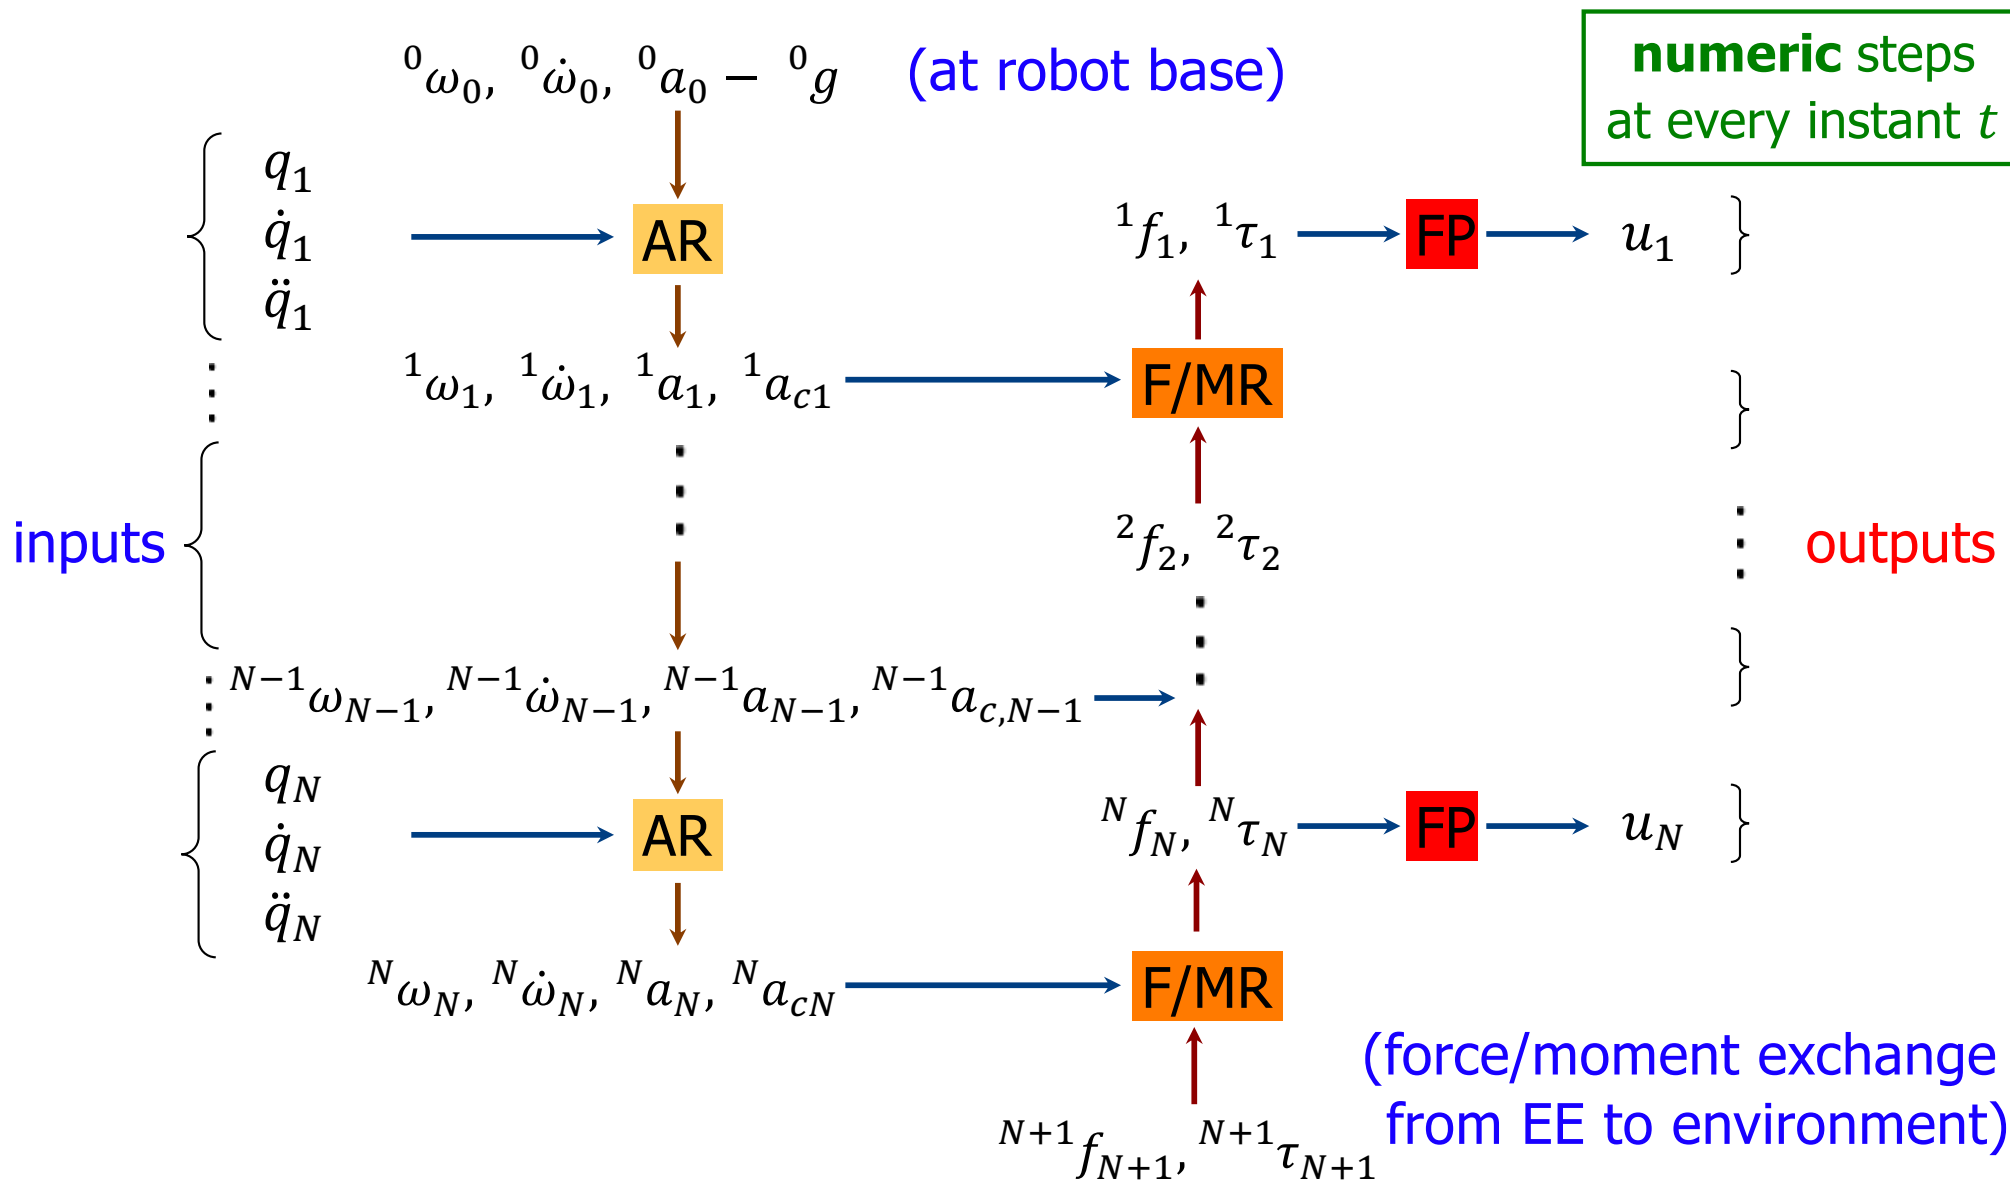



# Matlab (or C) script

general routine  $NE_\alpha(\text{arg}_1, \text{arg}_2, \text{arg}_3)$

assuming **no** interaction  
with the environment

$$(f_{N+1} = \tau_{N+1} = 0)$$

- data file (of a specific robot)
  - number  $N$  and types  $\sigma = \{0,1\}^N$  of joints (revolute/prismatic)
  - table of DH kinematic parameters
  - list of **ALL** dynamic parameters of the links (and of the motors)
- input
  - vector parameter  $\alpha = \{^0g, 0\}$  (presence or absence of gravity)
  - three ordered **vector arguments**
    - typically, samples of joint **position, velocity, acceleration** taken from a desired trajectory
- output
  - generalized force  $u$  for the **complete** inverse dynamics
  - ... or **single terms** of the dynamic model



# Examples of output

---

- complete inverse dynamics

$$u = NE_0(q_d, \dot{q}_d, \ddot{q}_d) = M(q_d)\ddot{q}_d + c(q_d, \dot{q}_d) + g(q_d) = u_d$$

- gravity term

$$u = NE_0(q, 0, 0) = g(q)$$

- centrifugal and Coriolis term

$$u = NE_0(q, \dot{q}, 0) = c(q, \dot{q})$$

- $i$ -th column of the inertia matrix

$$u = NE_0(q, 0, e_i) = M_i(q)$$

$e_i = i$ -th column  
of identity matrix

- generalized momentum

$$u = NE_0(q, 0, \dot{q}) = M(q)\dot{q} = p$$



## A further example of output

- **factorization** of centrifugal and Coriolis term

$$u = NE_0(q, \dot{q}, 0) = c(q, \dot{q}) = S(q, \dot{q})\dot{q}$$

- for later use, what about a “mixed” velocity term?

$$S(q, \dot{q})\dot{q}_r \Leftrightarrow \begin{cases} u = NE_0(q, \dot{q}_r, 0) = S(q, \dot{q}_r)\dot{q}_r \\ u = NE_0(q, e_i \dot{q}_{ri}, 0) = S_i(q, e_i \dot{q}_{ri})\dot{q}_{ri} \end{cases} \quad \text{no good!}$$

a)  $S(q, \dot{q})\dot{q}_r = S(q, \dot{q}_r)\dot{q}$ , when using Christoffel symbols

b)  $S(q, \dot{q} + \dot{q}_r)(\dot{q} + \dot{q}_r) = S(q, \dot{q})\dot{q} + S(q, \dot{q}_r)\dot{q}_r + 2S(q, \dot{q})\dot{q}_r$

$$\begin{aligned} \Rightarrow u &= \frac{1}{2} (NE_0(q, \dot{q} + \dot{q}_r, 0) - NE_0(q, \dot{q}, 0) - NE_0(q, \dot{q}_r, 0)) \\ &= S(q, \dot{q})\dot{q}_r \quad (\text{i.e., with 3 calls of standard NE algorithm}) \end{aligned}$$

[Kawasaki et al., IEEE T-RA 1996]



# Modified NE algorithm

modified routine  $\widehat{NE}_\alpha(\text{arg}_1, \text{arg}_2, \text{arg}_3, \text{arg}_4)$  with 4 arguments

[De Luca, Ferrajoli, ICRA 2009]

$$\widehat{NE}_\alpha(x, y, y, z) = NE_\alpha(x, y, z) \quad \text{consistency property}$$

e.g.,  $u = \widehat{NE}_0 g(q, 0, 0, 0) = NE_0 g(q, 0, 0) = g(q)$

$$u = \widehat{NE}_0(q, \dot{q}, \dot{q}, 0) = NE_0(q, \dot{q}, 0) = c(q, \dot{q}) = S(q, \dot{q})\dot{q}$$

$$\Rightarrow u = \widehat{NE}_0(q, \dot{q}, \dot{q}_r, 0) = S(q, \dot{q})\dot{q}_r \quad \text{with } \dot{M} - 2S \text{ skew-symmetric}$$


(i.e., with **1 call** of **modified** NE algorithm)

$$\Rightarrow u = \widehat{NE}_0(q, \dot{q}, e_i, 0) = S_i(q, \dot{q})$$


(i.e., the full matrix  $S$  satisfying the skew-symmetry of  $\dot{M} - 2S$  with  **$N$  calls** of the **modified** NE algorithm)



# Inverse dynamics of a 2R planar robot

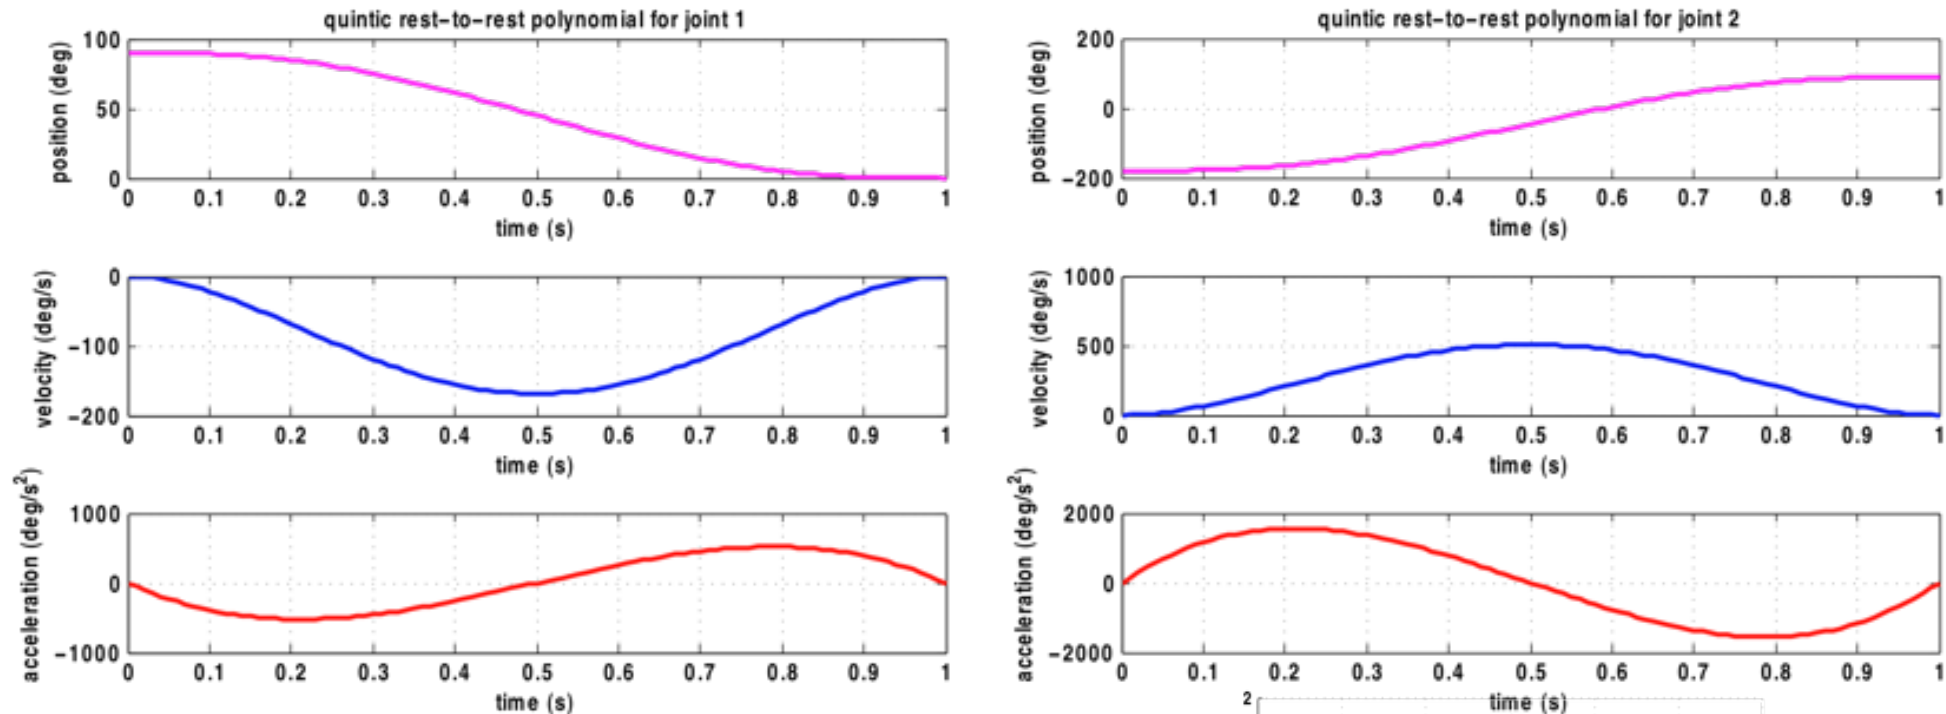


desired (smooth) joint motion:  
quintic polynomials for  $q_1, q_2$  with  
zero vel/acc boundary conditions  
from  $(90^\circ, -180^\circ)$  to  $(0^\circ, 90^\circ)$  in  $T = 1$  s

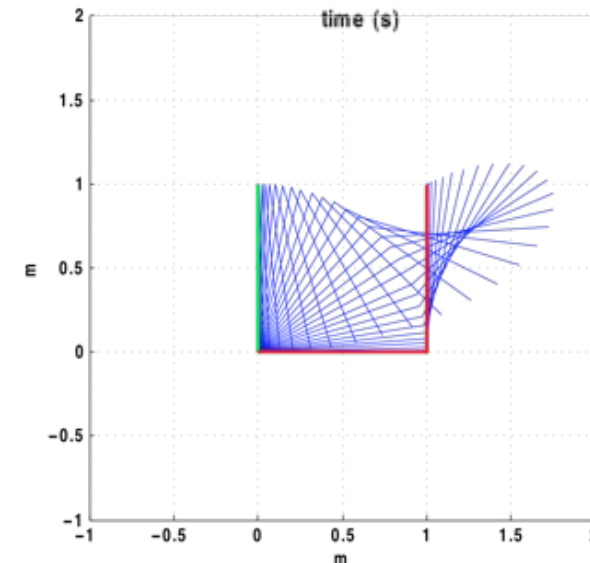



# Inverse dynamics of a 2R planar robot


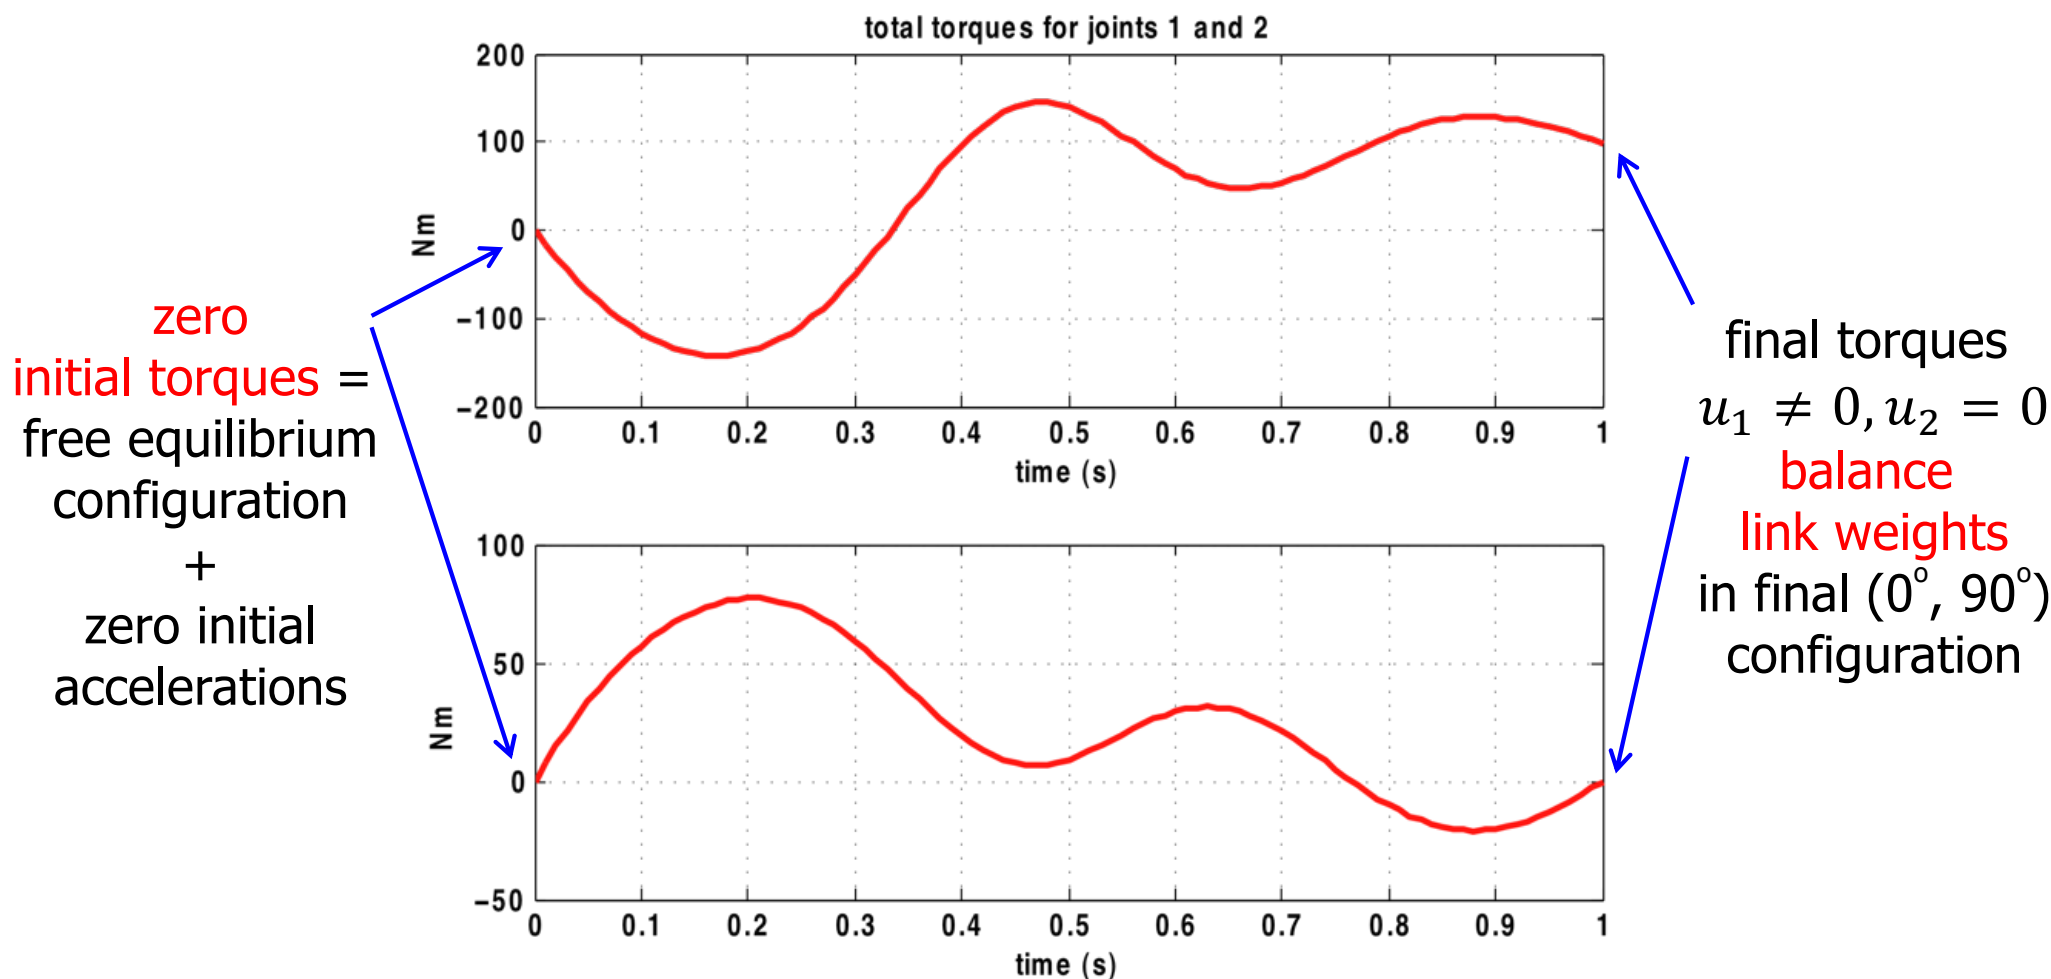


motion in vertical plane (under gravity)

both links are thin rods of uniform mass  $m_1 = 10$  kg,  $m_2 = 5$  kg



# Inverse dynamics of a 2R planar robot

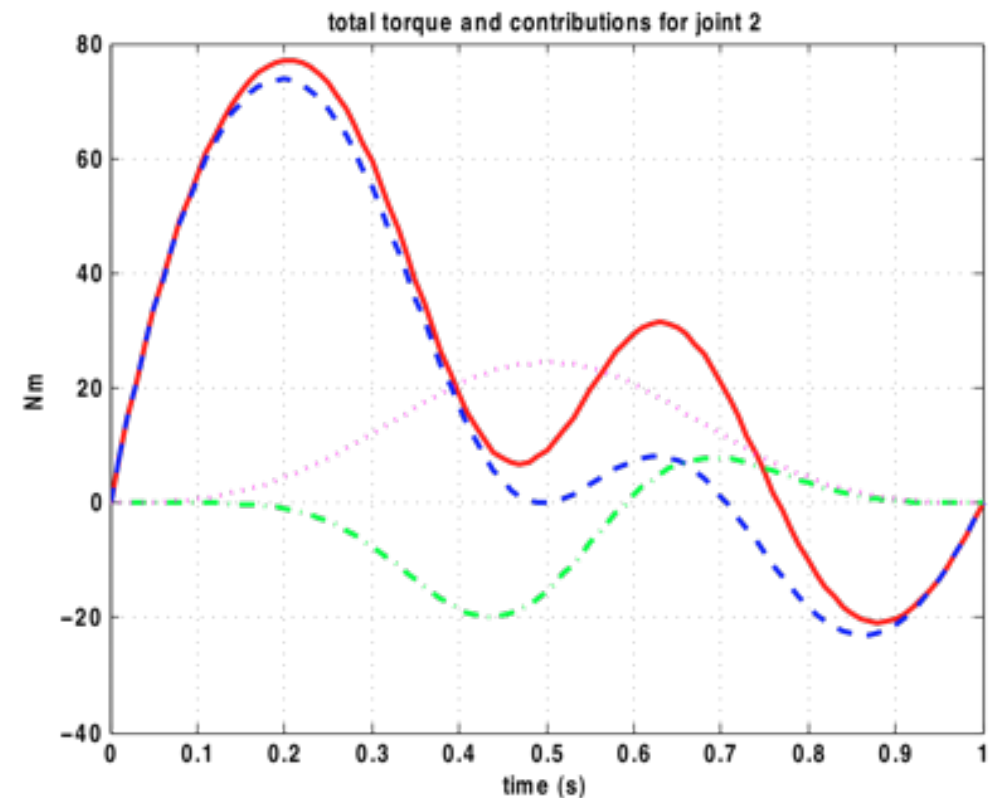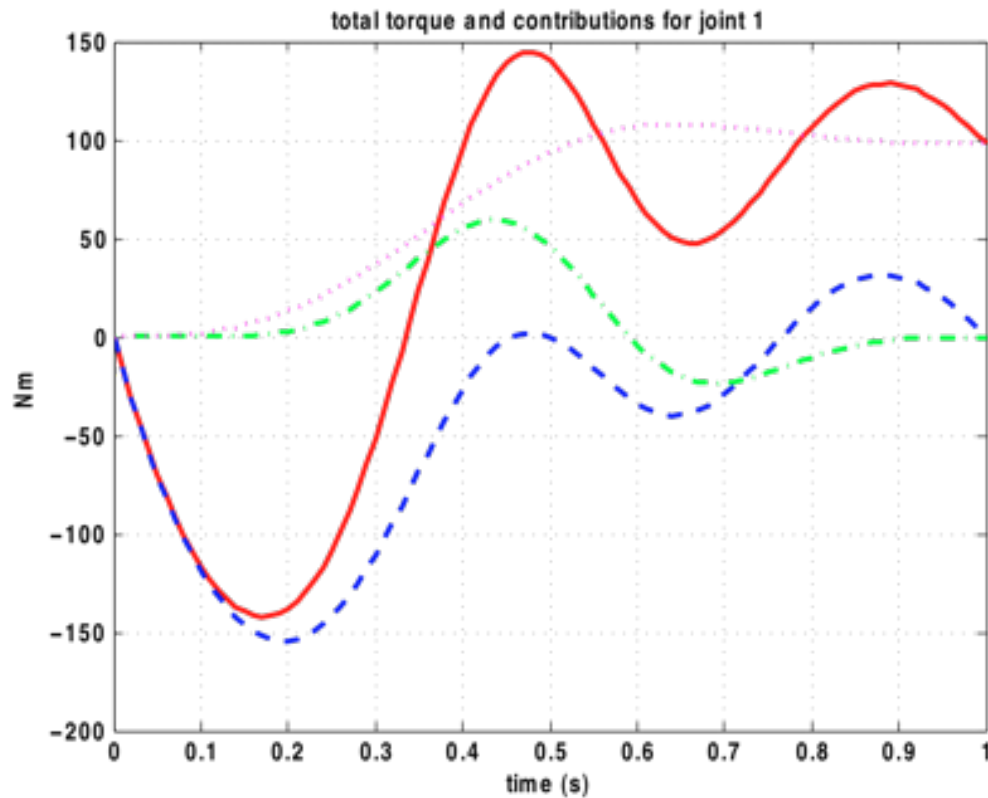

torque contributions at the two joints for the desired motion

— = total, --- = inertial  
- . - . - = Coriolis/centrifugal, ..... = gravitational

# Use of NE routine for simulation

## direct dynamics



- numerical integration, at **current** state  $(q, \dot{q})$ , of  
$$\ddot{q} = M^{-1}(q)[u - (c(q, \dot{q}) + g(q))] = M^{-1}(q)[u - n(q, \dot{q})]$$
- Coriolis, centrifugal, and gravity terms

$$n = NE_0(q, \dot{q}, 0) \quad \text{complexity } O(N)$$

- $i$ -th column of the inertia matrix, for  $i = 1, \dots, N$

$$M_i = NE_0(q, 0, e_i) \quad O(N^2)$$

- numerical inversion of inertia matrix

$$InvM = \text{inv}(M) \quad O(N^3) \\ \text{but with small coefficient}$$

- given  $u$ , integrate acceleration computed as

$$\ddot{q} = InvM * [u - n] \quad \longrightarrow \quad \text{new state } (q, \dot{q}) \\ \text{and repeat over time ...}$$